

# TECHNICAL DATA SHEET

## HVCRC® 240 - 47 Epsilon Advanced Conductors


**EPSILON**  
CABLE

International size	<b>GLASGOW</b>
ASTM Size	<b>WACO</b>
Technical designation	ECRC® 240-AL0/47-S1



Governing Units: Metric

### STRANDING CONFIGURATION

	No. & Diameter of HVCRC core	1 x 7.75	mm
	Aluminium Layers Construction / height	18 TW x	2.95 mm
	1st layer composition and $\phi_{eq}$	7 x	4.14 mm
	2nd layer composition and $\phi_{eq}$	11 x	4.08 mm
	Lay Direction of outer layer	Right Hand (Z)	

### CONDUCTOR PROPERTIES


Cross Sectional Area - Annealed Aluminium	238.2	mm <sup>2</sup>
Cross Sectional Area - HVCRC Core	47.2	mm <sup>2</sup>
Total Area of Conductor Cross Section	285.3	mm <sup>2</sup>
Nominal equivalent Aluminium Area (1350-H19 at 61%IACS)	246.0	mm <sup>2</sup>
Overall Diameter of Conductor	19.55	mm
Mass per unit length - Annealed Aluminium	659.0	kg/km
Mass per unit length - Core	87.3	kg/km
Mass per unit length - Conductor	746.3	kg/km
Ultimate Tensile Strength of Conductor	120.1	kN
Core Rated Tensile Strength	105.8	kN
Coefficient of Linear Expansion <b>Above</b> Thermal Kneepoint	1.3	10 <sup>-6</sup> K <sup>-1</sup>
Coefficient of Linear Expansion <b>Below</b> Thermal Kneepoint	16.34	10 <sup>-6</sup> K <sup>-1</sup>
Final Modulus of Elasticity <b>Above</b> Thermal Kneepoint	123	GPa
Final Modulus of Elasticity <b>Below</b> Thermal Kneepoint	66	GPa

### THERMAL SPECIFICATIONS

Maximum Continuous Operating Temperature <sup>(2)</sup> (surface temperature)	180	°C
Maximum Emergency Temperature / 8760 Hours <sup>(2)</sup> (surface temperature)	200	°C
Thermal Heat Capacity for Annealed Aluminium Layers	629.3	W.s/m.°C
Thermal Heat Capacity for Composite Core	69.8	W.s/m.°C

### ELECTRICAL SPECIFICATIONS

Maximum DC Electrical Resistance at 20°C (1370-O at 63%IACS)	0.1176	Ω.km <sup>-1</sup>
Temperature Coefficient of Resistance	4.03	10 <sup>-3</sup> K <sup>-1</sup>
AC Nominal Resistance at 25°C (surface temperature)	0.1207	Ω.km <sup>-1</sup>
AC Nominal Resistance at 75°C (surface temperature)	0.1442	Ω.km <sup>-1</sup>
AC Nominal Resistance at 160°C (surface temperature)	0.1844	Ω.km <sup>-1</sup>
AC Nominal Resistance at 180°C (surface temperature)	0.1939	Ω.km <sup>-1</sup>
AC Nominal Resistance at 200°C (surface temperature)	0.2033	Ω.km <sup>-1</sup>
AC Current Rating at 160°C (surface temperature) <sup>(1)</sup>	1,043	A
AC Current Rating at 180°C (surface temperature) <sup>(1)</sup>	1,108	A
AC Current Rating at 200°C (surface temperature) <sup>(1)</sup>	1,168	A

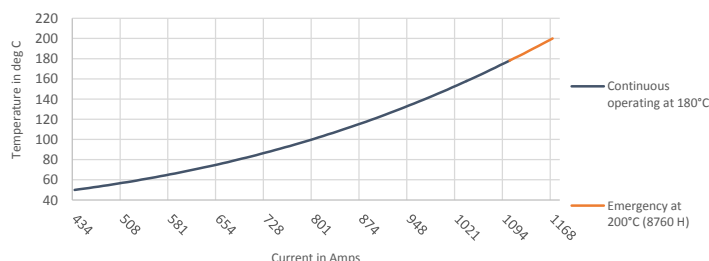

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C ambient temperature,	0.61 m/s wind velocity with an angle of 90 °,
1000 W/m <sup>2</sup> solar radiation,	0.5 solar absorption coefficient,
0.6 emissivity coefficient,	Resistance AC at 50 Hz current frequency.

(2) Temperatures defined according to ASTM B987-20.

Reference standards for core properties: ASTM B987-20.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Depending on conductor manufacturer rated specifications may slightly change.

Geometric Mean Radius (GMR)	8.07	mm
Inductive Reactance Ø0.3m radius	0.228	Ω.km <sup>-1</sup>
Capacitive Reactance Ø0.3m radius	0.197	MΩ.km

Revision	02
Ref. Document	ST21-00093
Date	12-Sep-2023

This document is the property of EPSILON COMPOSITE  
[contact@epsilon-cable.com](mailto:contact@epsilon-cable.com)  
[www.epsilon-cable.com](http://www.epsilon-cable.com)